



Emphasizing the Efficiency of a Cellulolytic Preparation on the Hydrolyzed Wood Wastes

Ana Despina Ionescu*, Angela Cășărică, Roxana - Mădălina Stoica and Nicoleta Ene

National Institute for Chemical, Pharmaceutical Research and Development, Bucharest, Romania

*Corresponding Author: Ana Despina Ionescu, National Institute for Chemical, Pharmaceutical Research and Development, Bucharest, Romania.

Received: June 21, 2020

Published: July 11, 2020

© All rights are reserved by Ana Despina Ionescu, et al.

Abstract

According to the literature data, the cellulose, the most abundant organic molecule on Earth, is found mainly as a structural component of plants and algal cell walls, it is also produced by some animals such as tunicates, and it can be produced also by several bacteria, by a natural pathway or by biotechnology. Due to this situation, there are many studies focused on the use of this kind of renewable source and having as their issues the preparation of different valuable products, such as sugars, ethanol, different chemicals, the whole yeasts biomass valorization with agricultural applications or for biofuels development.

Our issue of this present study was to verify if we can avoid the microbial additional activity during the process, mostly while the conversion starts from some materials already pretreated, such as the paper and cellulose industry's wastes, by using them as substrate in an optimized culture media formula, for the further yeasts strains development.

Keywords: Yeasts; Wood; Cellulases; Hydrolyzed; Wastes

Abbreviations

CA: *Candida robusta*; D 21, D 25: Indicators for the New Yeast Strains of *Saccharomyces cerevisiae*

Introduction

According to the literature data, the cellulose, the most abundant organic molecule on Earth, is found mainly as a structural component of plants and algal cell walls, it is also produced by some animals such as tunicates, and it can be produced also by several bacteria, by a natural pathway or by biotechnology [3,12]. Due to this situation, there are many studies focused on the use of this kind of renewable source and having as their issues the preparation of different valuable products, such as sugars [3,7,8,10], ethanol [4,9,14], different chemicals [10,11,15], the whole yeasts biomass valorization with agricultural applications [2,13] or for biofuels development [1,4,5,6,13,15].

The usually applied methods in order to realize the hydrolysis of the lignocellulosic substrates until fermentable sugars are involving some first steps of chemical and hydrothermal pretreatment, followed sometimes by an enzymatic hydrolysis [3,10].

However these biotechnological pathways must be established according to many factors, such as the geographical origin of the raw material, the nature of the substrate (directly woody biomass, industrial wastes or agricultural residues) the nature of the enzymatic complex (depending on the applied microbial strains) and the final task of the studies able to ensure the economic viability of bioconversion [4,10].

Our issue of this present study was to verify if we can avoid the microbial additional activity during the process, mostly while the conversion starts from some materials already pretreated, such as the paper and cellulose industry's wastes, by using them as substrate in an optimized culture media formula, for the further yeasts strains development.

Materials and Methods

The samples used as researches' substrate were taken from the paper and cellulose industry's wastes and they were represented by dried beech wood chips, wet beech wood chips and wet and fine beech wood chips, containing 24 - 25 g/L reducing sugar all of them.

The optimal results concerning the culture media composition were obtained with 35% vegetable wastes hydrolyzed, sugar beet molasses, mineral supplements and a pH correction at 5,0 - 6,0 and they were presented within a previous paper [16].

The enzymatic preparation used for our researches was represented by a commercial product.

The yeasts strains isolated during our first studies from different natural sources were marked at the beginning only with indicators, such as D1-D25, CA-C3, etc. depending on their harvest area, and their activity was compared with that of different yeasts strains previously identified and included in the microbial collection kept inside our institute.

By using this method and some other characters, our previously selected yeasts strains could belong mostly to the species *Candida robusta* and *Saccharomyces cerevisiae* [16].

The yeasts growth were verified by the optical density evolution (determination meaning the cells number which are present in a well determined liquid volume), the reducing sugar's consumption, the Ph dynamics and the yeasts dry weight increase.

Results and Discussion

A set of 4 series of fermentation processes were carried out at a laboratory scale, by using 3 previously selected yeast strains (CA, D-21, D-25) and were verified on a process duration of 66 hours.

The obtained results are presented by the table 1-3, each of them being realized for all 3 yeasts strains and according to the

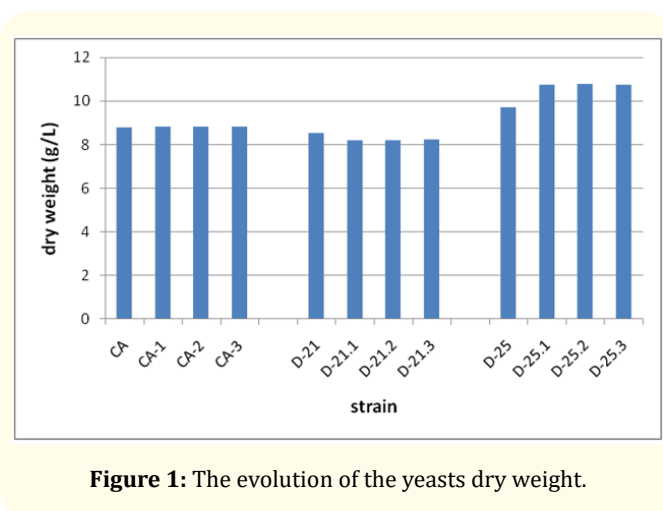


Figure 1: The evolution of the yeasts dry weight.

evolution of a fermentation parameter (pH, sugar concentration and optical density).

The final levels of the yeast dry weight were presented also separately by the figure 1.

Our obtained results indicate that the enzymatic supplement containing cellulases did not have an important role related to the yeasts growth, which means that in the case of using as substrate some industrial wood wastes, the chemical and hydrothermal pretreatment involved during the usual industrial production and supplemented with other soft pretreatment methods used at a laboratory scale were enough in order to hydrolyze the lignocellulosic material until significant levels of reducing sugars concentration and yeast dry weight.

No flask	Strain	Culture media	0h		24h			42h		66h	
			pH	pH	pH	pH	pH	pH	pH	Dry weight g/L.	
1	CA	E (with enzyme and pH correction)	6,0	7,5	With 1 drop	7,5	5,0	5,0	8,80		
2	CA	Without E	6,0	7,0	0	8,0	No pH correction	8,0	8,82		
3	CA-2	Without E	6,0	7,0	0	8,0	No pH correction	8,0	8,81		
4	CA-3	Without E	6,0	7,0	0	8,0	No pH correction	8,0	8,82		
5	D21	E (with enzyme and pH correction)	6,0	7,3	With 1 drop	7,5	6,0	6,0	8,52		
6	D21	Without E	6,0	7,0	0	8,0	No pH correction	6,0	8,18		

7	D21-2	Without E	6,0	7,0	0	8,0	No pH correction	6.0	8,20
8	D21-3	Without E	6,0	7,0	0	8,0	No pH correction	6.0	8,23
9	D-25	E (with enzyme and pH correction)	6,0	7,3	With 1 drop	7,5	5,0	5.0	9,71
10	D-25	Without E	6,0	7,0	0	8,0	No pH correction	5,0	10,75
11	D-25-2	Without E	6,0	7,0	0	8,0	No pH correction	5,0	10,77
12	D-25-3	Without E	6,0	7,0	0	8,0	No pH correction	5,0	10,74

Table 1: The pH evolution in g case of the additional enzymic preparation on the yeasts development on wood hydrolyzed.

The fermentation Indicators:

Inoculum with pH 5,0 for all yeast strains, Inoculum age- 24h, 6 ml inoculum for 100 ml media.

Initial sugar level: 0,847% at media without enzyme, 1,126% for media supplemented with enzyme.

Initial dry weight: 1,645 g/L.

No flask	Strain	Culture media	0h	24h		42h	66h	
			Sugar %	Sugar %	pH correction with H ₂ SO ₄	Sugar %	Sugar %	Dry weight g/L.
1	CA	E (with enzyme and pH correction)	0,8	0,21	With 1 drop	0,21	0,18	8,80
2	CA	Without E	0,3	0,27	0	0,27	0,24	8,82
3	CA-2	Without E	0,3	0,27	0	0,27	0,24	8,81
4	CA-3	Without E	0,3	0,27	0	0,27	0,24	8,82
5	D21	E (with enzyme and pH correction)	0,8	0,12	With 1 drop	0,12	0,09	8,52
6	D21	Without E	0,3	0,21	0	0,21	0,21	8,18
7	D21-2	Without E	0,3	0,21	0	0,21	0,21	8,20
8	D21-3	Without E	0,3	0,21	0	0,21	0,21	8,23
9	D-25	E (with enzyme and pH correction)	0,8	0,21	With 1 drop	0,18	0,15	9,71
10	D-25	Without E	0,3	0,27	0	0,15	0,12	10,75
11	D-25-2	Without E	0,3	0,27	0	0,15	0,12	10,77
12	D-25-3	Without E	0,3	0,27	0	0,15	0,12	10,74

Table 2: The evolution of sugar concentration in the case of the additional enzymic preparation on the yeasts development on wood hydrolyzed.

The fermentation Indicators:

Inoculum with pH 5,0 for all yeast strains, Inoculum age- 24h, 6 ml inoculum for 100 ml media.

Initial sugar level: 0,847% at media without enzyme, 1,126% for media supplemented with enzyme.

Initial dry weight: 1,645 g/L.

No flask	Strain	Culture media	0h	24h		42h	66h	
			DO	DO	pH correction with H ₂ SO ₄	DO	DO	Dry weight g/L.
1	CA	E (with enzyme and pH correction)	2,3	9,25	With 1 drop	9,25	9,5	8,80
2	CA	Without E	1,37	9,37	0	9,25	9,5	8,82
3	CA-2	Without E	1,37	9,37	0	9,25	9,5	8,81
4	CA-3	Without E	1,37	9,37	0	9,25	9,5	8,82
5	D21	E (with enzyme and pH correction)	2,37	9,37	With 1 drop	9,37	9,5	8,52
6	D21	Without E	1,3	11,0	0	9,87	9,4	8,18
7	D21-2	Without E	1,3	11,0	0	9,87	9,4	8,20
8	D21-3	Without E	1,3	11,0	0	9,87	9,4	8,23
9	D-25	E (with enzyme and pH correction)	2,3	10,25	With 1 drop	8,75	11,0	9,71
10	D-25	Without E	1,3	8,0	0	10,7	10,25	10,75
11	D-25-2	Without E	1,3	8,0	0	10,7	10,25	10,77
12	D-25-3	Without E	1,3	8,0	0	10,7	10,25	10,74

Table 3: The DO (Optical density) evolution in the case of the additional enzymic preparation on the yeasts development on wood I.

The fermentation Indicators:

Inoculum with pH 5,0 for all yeast strains, Inoculum age- 24h, 6 ml inoculum for 100 ml media.

Initial sugar level: 0,847% at media without enzyme, 1,126% for media supplemented with enzyme.

Initial dry weight: 1,645 g/L.

Conclusion

- The main purpose of our work was the valorization of the paper and cellulose industry's wastes by using them as substrate for the yeasts strains development.
- This paper presents only the results obtained by using the yeasts strains new selected by our previously researches.
- The enzymatic supplement containing cellulases did not have an important role related to the yeasts growth, which means that in the case of using as substrate some industrial wood wastes, the thermo- chemical pretreatment involved during the usual industrial production and some other soft pretreatment methods used at a laboratory scale were enough in order to hydrolyze the lignocellulosic material until a significant reducing sugar concentration.

- Different types of hydrolyzed wood wastes can be recycled by microbiological ways, so that by so called "Green technologies" which seems to act friendly to our environment, while one of our main tasks was to use materials and technologies as natural as possible.
- The obtained yeasts biomass can be further used as fodder yeasts, for Ethanol obtaining, for biofuels production or as a component of different nutritional supplements.

Bibliography

1. Minliang Yang and Nawa Raj Baral. "Accumulation of high-value bioproducts in planta can improve the economics of advanced biofuels". *Proceedings of the National Academy of Science of the USA (PNAS)* 117 (2020): 8639-8648.

2. Felix Barber and Ariel Amir. "Cell-size regulation in budding yeast does not depend on linear accumulation of Whi5". *Proceedings of the National Academy of Science of the USA (PNAS)* 117 (2020): 14243-14250.
3. Rosa Estela Quiroz-Castañeda and Jorge Luis Folch-Mallol. "Hydrolysis of Biomass Mediated by Cellulases for the Production of Sugars". www.intechopen.com (2013).
4. Consolacion Alvarez and Francisco Manuel Reyes- Sosa. "Enzymatic hydrolysis of biomass from wood". *Microbial Biotechnology (USA)* 9.2 (2016): 149-156.
5. Ekwe E., *et al.* "Non-hydrolytic cellulose active proteins: research progress and potential application in biorefineries". *Industrial Biotechnology* 9 (2013): 123-131.
6. Jørgensen H and Kristensen JB. "Enzymatic conversion of lignocellulose into fermentable sugars: challenges and opportunities". *Biofuels, Bioproducts and Biorefining* 1 (2007): 119-134.
7. Liu H and Zhu JY. "Effect of lignin-metal complexation on enzymatic hydrolysis of cellulose". *Journal Agric Food Chemistry* 58 (2010).
8. Pan XJ., *et al.* "Strategies to enhance the enzymatic hydrolysis of pretreated softwood with high residual lignin content". *Biotechnology and Applied Biochemistry* 121 (2005).
9. Pan XJ., *et al.* "The bioconversion of mountain pine beetle-killed lodgepole pine to fuel ethanol using the organosolv process". *Biotechnology and Bioengineering* 101 (2008): 39-48.
10. Yu- Loong Loow and Ta Yeoung Wu. "Typical conversion of lignocellulosic biomass into reducing sugars using dilute acid hydrolysis and alkaline pretreatment". *Cellulose* 23 (2016): 1491-1520.
11. Baadhe RR and Potumarthi R. "Influence of dilute acid and alkali pretreatment on reducing sugar production from corn-cobs by crude enzymatic method: a comparative study". *Biore-sources Technology* 162 (2014).
12. Panaitescu Denis Mihaela., *et al.* "Role of bacterial cellulose and poly (3-hydroxyhexanoate-co-3-hydroxyoctanoate) in poly (3-hydroxybutyrate) blends and composites". *Cellulose* 25.10 (2018).
13. Christos K Nitsos and Polycarpos A Lazaridis. "Enhancing Lignocellulosic Biomass Hydrolysis by Hydrothermal Pretreatment, Extraction of Surface Lignin, Wet Milling and Production of Cellulolytic Enzymes". *Chemistry Europe (European Chemical Societies Publishing)* 12.6 (2019).
14. Rogelio Pérez-Cadena., *et al.* "Production of Ethanol by Three Yeasts in Defined Media and Hydrolyzed Cladodes of *Opuntia ficus-indica* var. *Atlixco*". *International Journal of Agriculture and Forestry* 8.1 (2018).
15. Margareth Øverland. "Why Grow Yeast on Tree Waste?" Interview on FEEDINFO (2020)
16. Ionescu Ana Despina and Casarica Angela. "Screening of some culture media compositions for obtaining the optimal yeast strains development on different natural sources of wood wastes (wood hydrolyzed)". *Acta Scientific Microbiology* 3.1 (2019).

Assets from publication with us

- Prompt Acknowledgement after receiving the article
- Thorough Double blinded peer review
- Rapid Publication
- Issue of Publication Certificate
- High visibility of your Published work

Website: www.actascientific.com/

Submit Article: www.actascientific.com/submission.php

Email us: editor@actascientific.com

Contact us: +91 9182824667