



Process Systems Stability

Christo Boyadjiev*

Institute of Chemical Engineering, Bulgarian Academy of Sciences, Bulgaria

***Corresponding Author:** Christo Boyadjiev, Institute of Chemical Engineering, Bulgarian Academy of Sciences, Bulgaria.

Received: July 17, 2019; **Published:** August 20, 2019

Abstract

A theoretical analysis of the stability of the non-equilibrium process systems is presented. A unified approach is proposed for the creation of the mathematical models of the systems that allows the determination of the velocities at which the systems move to their thermodynamic equilibriums and their use for mathematical analysis of systems velocities stability. For this purpose is used mathematical stability theory, evolution (autonomous) equations, bifurcation theory (stable focuses, stable cycles), parameter eigenvalues and eigenfunctions.

Keywords: Stepped Complex; Stability Theory; Evolution Equations; Bifurcation Theory; Stable Focuses; Stable Cycles; Parameter Eigenvalues

Introduction

Non-equilibrium process systems are aggregations of physical, chemical and biological processes. They "move" to their thermodynamic equilibrium with a velocity that depends on the velocities of the individual processes. Non-equilibrium process systems are stable when two conditions are met:

- The velocity of movement towards their thermodynamic equilibrium is a constant;
- Capable of rapidly reaching their constant velocity at deviations, as a result of smooth change of external conditions.

The theoretical analysis of the stability of the non-equilibrium process systems consists of 2 stages:

- Creation a mathematical model of the system, allowing the determination of the velocity at which the system moves to its thermodynamic equilibrium;
- Mathematical analysis of system velocity stability.

The first stage is different for individual systems, while the second stage is common to all process systems.

An unified approach will be proposed for the creation of a mathematical model of the system, which permits to be obtained the velocity of the system movement to its thermodynamic equilibrium and mathematical analysis of the system stability.

Process systems kinetics

The kinetics of process systems depends on a set of variables. If the velocity of the process system is denoted by the values of these variables, the equation of the kinetic model of the process system will have the form:

$$y = f(x_1, \dots, x_n). \quad \dots\dots\dots(1)$$

This function is a mathematical structure that is retained when changed the measurement system of the variable, i.e. this mathematical structure is invariant with respect to similar transformations [1]:

$$\bar{x}_i = k_i x_i, \quad i = 1, \dots, n, \quad \dots\dots\dots(2)$$

i.e. is a homogeneous function:

$$ky = f(k_1 x_1, \dots, k_n x_n) \varphi(k_1, \dots, k_n) \cdot f(x_1, \dots, x_n), \quad k = \varphi(k_1, \dots, k_n). \quad \dots\dots\dots(3)$$

From this it follows [1] that it can be represented by a power functions complex:

$$y = kx_1^{\alpha_1} x_2^{\alpha_2} \dots x_n^{\alpha_n}, \quad \dots\dots\dots(4)$$

where the parameters $k, \alpha_1, \dots, \alpha_n$ are determined by experimental data of the process system velocity. This allows to consider the velocity of the process system y (phase velocity) as a point in a n - dimension space, with coordinates x_1, \dots, x_n (phase space). Velocity projections on coordinate axes x_1, \dots, x_n are $\frac{dx_i}{dt}$ ($i = 1, \dots, n$) and satisfy the "evolution" law of the process system:

$$\frac{dx_i}{dt} = a_i y = a_i kx_1^{\alpha_1} \dots x_n^{\alpha_n}; \quad t = 0, \quad x_i = x_{0i}; \quad i = 1, \dots, n, \quad \dots\dots\dots(5)$$

where a_1, \dots, a_n represent the ratios of variable x_1, \dots, x_n velocities and the process system velocity y .

The components of the phase velocity $\frac{dx_i}{dt}$ ($i = 1, \dots, n$) are the coordinates of the vector field at the same phase velocity and determine the velocity of motion of the process system in the phase space. The points $x_i(t)$ ($i = 1, \dots, n$) represent a curve (phase trajectory) in the scalar phase space.

If we use the rule to differentiate a exponent function, the derivative of the velocity of the process system (4) over the time has the form:

$$\frac{dy}{dt} = k \prod_{i=1}^n [x_i(t)]^{\alpha_i} \sum_{i=1}^n \left[\frac{dx_i}{x_i(t)} \alpha_i \right]. \quad \dots\dots\dots(6)$$

From this equation is possible to be obtained stability condition $\frac{dy}{dt} = 0$ of the process system:

$$k \prod_{i=1}^n [x_i(t)]^{\alpha_i} \sum_{i=1}^n \left[\frac{dx_i}{x_i(t)} \alpha_i \right] = 0. \quad \dots\dots\dots(7)$$

The solution of this set of equations allows the determination of the conditions for the stability of the process system.

Mathematical stability theory

The velocity of the non-equilibrium process systems with which they "move" to their thermodynamic equilibrium is determined by the theory of the evolution equations [2-4]. Their capable of rapidly reaching their constant velocity at deviations, as a result of smooth change of external conditions, is determined by the theory of bifurcations [5].

Evolution equations

Let consider the process system velocity, which may be determined by the variables x_i ($i = 1, \dots, n$). This permits to consider the state of the system as a point in n -dimensional space with co-ordinates x_i ($i = 1, \dots, n$) (a phase space).

The changing of the system velocity over the time is a vector in the n -dimensional space. Its projections on coordinate axes $\frac{dx_i}{dt}$ ($i = 1, \dots, n$) satisfy the "evolution" law of the system:

$$\frac{dx_i}{dt} = X_i(x_1, \dots, x_n, t), \quad x_i(0) = x_{0i}, \quad i = 1, \dots, n. \quad \dots\dots\dots(8)$$

The evolution equations (8) for systems with laws independent of the time are termed autonomous equations:

$$\frac{dx_i}{dt} = X_i(x_1, \dots, x_n), \quad x_i(0) = x_{0i}, \quad i = 1, \dots, n. \quad \dots\dots\dots(9)$$

The components of the phase velocity $X_i(i, \dots, n)$ are the co-ordinates of the vector field of the same phase velocity and determine the velocity of the system in the phase space. The points $x_i(t)$ (i, \dots, n) represent a curve (a phase trajectory) in the scalar phase space (field).

For simplicity of explanation consider the autonomous equation

$$\frac{dx}{dt} = X(x), \quad x(0) = x_0. \quad \dots\dots\dots(10)$$

The system is stable when the system velocity does not change over the time:

$$X(x) = 0, \quad \dots\dots\dots(11)$$

i.e.

$$X(a) = 0. \quad \dots\dots\dots(12)$$

It follows from (12) that the point $x = a$ may be considered as a stationary point (the system velocity is constant over time). If $a = x_0$ it clear that

$$x(t) \equiv a \quad \dots\dots\dots(13)$$

is a solution of (10), where a is a singular point.

For simplicity will be considered the linear version of the equation (10) and its solution:

$$\frac{dx}{dt} = \lambda x, \quad x(0) = x_0, \quad x = x_0 \exp(\lambda t). \quad \dots\dots\dots(14)$$

It is follows from (14) that $x = 0$ is a singular point, i.e. $x_0 = 0$ and the solution of (14) has the following features (see Figure 1):

$$\lambda < 0, \quad \lim_{t \rightarrow \infty} x(t) = 0, \quad \forall x_0; \quad \dots\dots\dots(15)$$

$$\lambda = 0, \quad x = x_0, \quad \forall x_0; \quad \dots\dots\dots(16)$$

$$\lambda > 0, \quad x = x_0, \quad \text{at } t = 0; \quad \dots\dots\dots(17)$$

$$\lambda > 0, \quad \lim_{t \rightarrow \infty} x(t) \rightarrow \infty, \quad \forall x_0 > 0;$$

$$\lambda > 0, \quad \lim_{t \rightarrow \infty} x(t) \rightarrow -\infty, \quad \forall x_0 < 0.$$

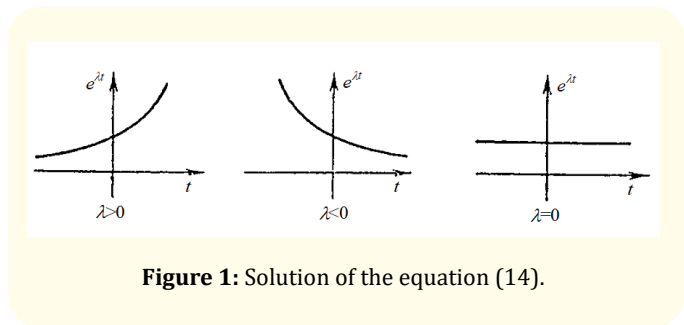


Figure 1: Solution of the equation (14).

The multiformity of the solution at $\lambda > 0$ is not a result of its non-uniqueness, but this due to the solution instability with respect of the small perturbation of the initial condition (x_0).

The solution of the equation (14) leads to the following conclusions

1. The solution (the process) is unstable at $\lambda > 0$ and the small deviations of the initial state $x_0 \neq 0$ lead to deviations of the solution $x \neq 0$.
2. At $\lambda > 0$ the solution is unstable for each x_0 .
3. At $\lambda \leq 0$ the solution is approaching to the singular point $x = 0$, i.e. the stationary point become a focus of attraction of the solution (an attractor).

The linear equation (14), together with the conditions for the solution stability, are attractive because they give the basis of the kinetics models of many important processes (evolution of the organisms, nuclear processes, chemical reactions etc.) These features in the area of the real number (R) become more interesting in the complex area (C), where the equation (14) has the form:

$$\frac{dz}{dt} = \lambda z, \quad z \in C, \quad \lambda \in C, \quad t \in R, \quad z(0) = z_0, \quad z(t) = z_0 \exp(\lambda t). \quad \dots\dots\dots(18)$$

Bifurcation theory

The bifurcation theory [5] is wide applied for investigations of jump reactions of systems as responses of smooth changes of the external conditions. For the real systems it has been developed recently as a theory of the catastrophes. Here, the bifurcation theory will be considered in two-dimensional phase space only.

For clarity of explanation, consider that a real evolutionary process occurring in the phase plane (x, y) and the corresponding model is:

$$\frac{dx}{dt} = X(x, y, \mu), \quad \frac{dy}{dt} = Y(x, y, \mu), \quad x(0) = x_0, \quad y(0) = y_0. \quad \dots\dots\dots(19)$$

The system evolution in time is represented by the phase trajectory (the trajectory of the phase point) of the process

$$F(x, y, \mu) = 0, \quad \dots\dots\dots(20)$$

where $x(t)$ and $y(t)$ in (20) are determined from the solution of (19). Depending on the form of the relationships for X and Y in (19), the parameter μ and the initial conditions x_0 and y_0 various phase trajectories are possible.

The variations of the parameter μ lead to several interesting cases of the solution of (19) shown in Figure 2. The case shown in Figure 2a corresponds to a periodic process that is attenuating with the time and approaching a focus (a stationary state point). If other value of μ is chosen the process might be unstable and periodic (Figure 2b). The stable periodic processes (limit cycles) have closed trajectories in the phase space (Figure 2c). The change of the initial state (y_0) of the stable processes leads to attenuating processes approaching a stable periodic state (Figure 2d).

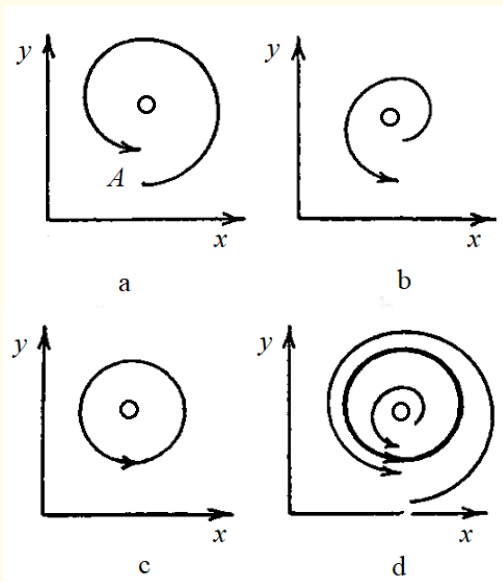


Figure 2: Phase trajectories.

Figure 2 may be developed for more complicated cases (see Figure 3). It is possible the existence of two limit cycles (periodic processes and solutions), where one of them (the internal) is stable if the initial conditions are in the entire internal area of the large cycle. The internal cycle attracts all the solutions, while the external cycle is unstable (Figure 3a). The variations of the parameter μ may lead to a junction of both cycles (Figure 3b). The junction of an unstable and a stable cycle (as these in Figure 3a) may lead to an abnormal limit cycle (Figure 3b). In this case the solutions go from

the initial conditions in internal area, approach the cycle and then due to small perturbations may go out of the cycle, so the process becomes unstable. The further changes of μ may lead to a situation when the limit cycle disappear and the process becomes unstable (Figure 3c).

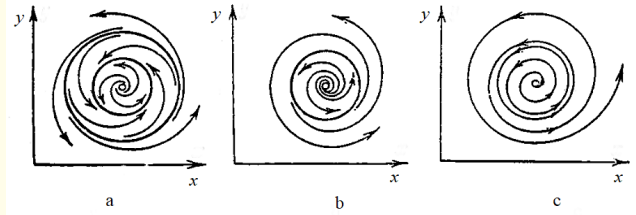


Figure 3: Limit cycles.

The resulted obtained here show that the bifurcation theory considers qualitatively the changes of the movement of phase point as a result of a continuous variation of the model parameters. Parallel to the existence of stable points (foci) there are stable cycles. They describe stationary periodic oscillations of the systems (self-oscillations). They differ from the free oscillations (of a pendulum for example) where the system does not interact with the environment as well as from the forced oscillations provoked by external periodic impacts.

The foci and the limit cycles attracting the solution (the phase point) are termed attractors.

Figure 4 shows bifurcations of cycle transitions from foci. The case (a) corresponds to a supercritical bifurcation (stable closed trajectories), while the case (b) presents a subcritical bifurcation (unstable and closed trajectories).

Further, Figure 4a shows the mechanism of a transition from a stable point (focus) toward a stable orbit (cycle). This type of bifurcation is shown in Figure 5. The stages of that transition are: 1) a stable point; 2) the occurrence of a closed trajectory; 3) an increase of the closed trajectory amplitude. This order leads to the existence of stable three-dimensional torus.

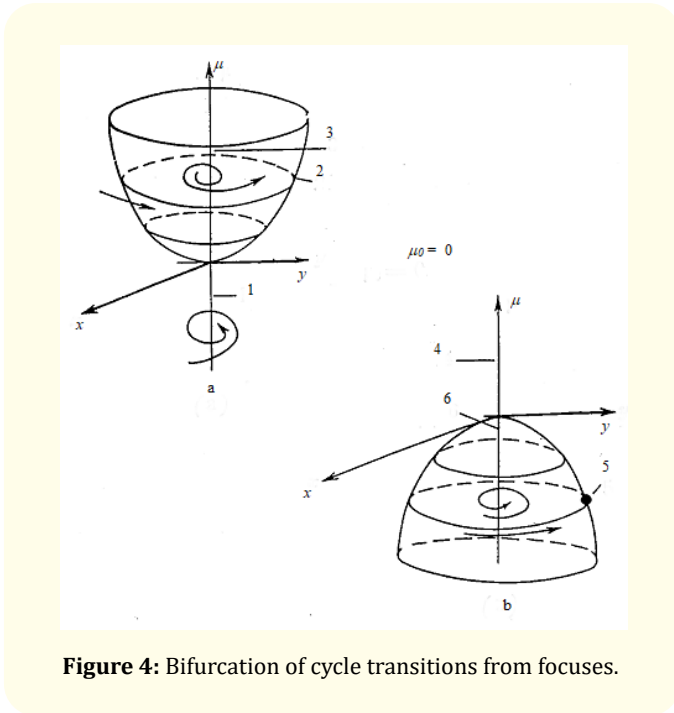


Figure 4: Bifurcation of cycle transitions from focuses.

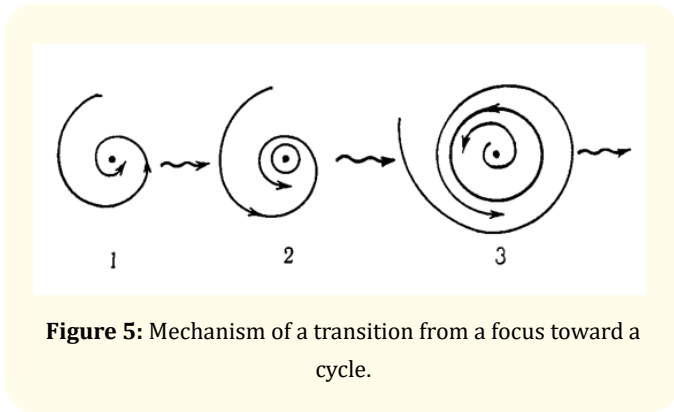


Figure 5: Mechanism of a transition from a focus toward a cycle.

Eigenvalue problems

The presented analysis of the processes and the systems concerns its stabilities as functions of the model parameters. This requires a solution of differential equations with parameters. It is possible that the solution of the differential equation to exist at a given point (e.g. focus), only for a specific value of the parameter - "eigenvalue". For example, the second-order ordinary differential equation, when the boundary conditions are presented at two different points, can have solution for a specific value of the para-

meter only, i.e. this leads to eigenvalue problems. The solution to this problem will be demonstrated in a first order linear ordinary homogeneous differential equation:

$$y' + [f(x) + \lambda g(x)]y = 0, \dots\dots\dots(21)$$

where λ is a parameter and the solution must to satisfy the condition:

$$y(b) = \alpha y(a), \quad \alpha \neq 0. \dots\dots\dots(22)$$

The solution of (21) is well known

$$y = C \exp \left[- \int_a^x (f + \lambda g) dx \right]. \dots\dots\dots(23)$$

The substitution of (23) in (22) shows that the condition (22) is satisfied, when $\lambda = \lambda_0$, only:

$$\lambda_0 = - \frac{\ln \alpha + \int_a^b f dx}{\int_a^b g dx}, \dots\dots\dots(24)$$

well known as an eigenvalue. The substitution of (24) in (23) leads to an eigenfunction. Thus, for example at $f \equiv 0$ and $g \equiv 1$ it follows directly:

$$\lambda_0 = \frac{\ln \alpha}{a-b}, \quad y = C \exp \left[- \frac{\ln \alpha (x-a)}{a-b} \right]. \dots\dots\dots(25)$$

It is well demonstrated in the differential equation theory [6] that if $\int_a^b g dx \neq 0$ there is an infinite set of eigenvalues:

$$\lambda_k = \lambda_0 + \frac{2k\pi i}{\int_a^b g dx}, \quad k = 0, \pm 1, \pm 2, \dots \dots\dots(26)$$

The results obtained are used [7] for the theoretical analysis of the hydrodynamics stability in systems with non-linear mass transfer.

Conclusions

The presented theoretical analysis shows, that the stability of the non-equilibrium process systems (aggregations of physi-

cal, chemical, biological and economic processes) is possible to be analyzed by the creation a mathematical model of the system, the determination of the velocity at which the system moves to its thermodynamic equilibrium and mathematical analysis of system velocity stability.

A unified approach is proposed for the creation of the mathematical models of the systems that allows the determination of the velocities at which the systems move to their thermodynamic equilibriums and their use for mathematical analysis of systems velocities stability. For this purpose is used mathematical stability theory, evolution (autonomous) equations, bifurcation theory (stable focuses, stable cycles), parameter eigenvalues and eigenfunctions.

Bibliography

1. Chr. Boyadjiev. "Theoretical Chemical Engineering". Modeling and simulation, Springer-Verlag, Berlin Heidelberg (2010): 594.
2. VI Arnold. Ordinarily Differential Equations, Nauka, Moskow (1984).
3. M. Braun, Differential Equations and their Applications, Springer-Verlag, New York (1978).
4. D Zwillinger. Handbook of Differential Equations (ed. II) Acad. Ress. Inc., Boston (1957).
5. JE Marsden and M McCracken. The Hopf Bifurcation and its Application, Springer-Verlag, New York (1976).
6. E Kamke. Differentialgleichungen, Leipzig (1959).
7. Chr Boyadjiev and VN Babak. "Non-Linear Mass Transfer and Hydrodynamic Stability". Elsevier, Amsterdam (2000).

Volume 3 Issue 9 September 2019

© All rights are reserved by Christo Boyadjiev.